


This form is a summary description of the model entitled "AirplaneLD" proposed for the Model Checking Contest @ Petri Nets. Models can be given in several instances parameterized by scaling parameters. Colored nets can be accompanied by one or many equivalent, unfolded P/T nets. Models are given together with property files (possibly, one per model instance) giving a set of properties to be checked on the model.

Description

This model was elaborated during a joint project with ONERA and Sextant Avionique dealing with the modeling and verification of critical components in airplane systems. This is a simplified version of a landing detector used to activate the flaps in the system.

The parameter of his model is used to deduce the maximum speed, the maximum altitude and two threshold values for the system (these threshold values are different from the original model, this does not change the complexity of the model).

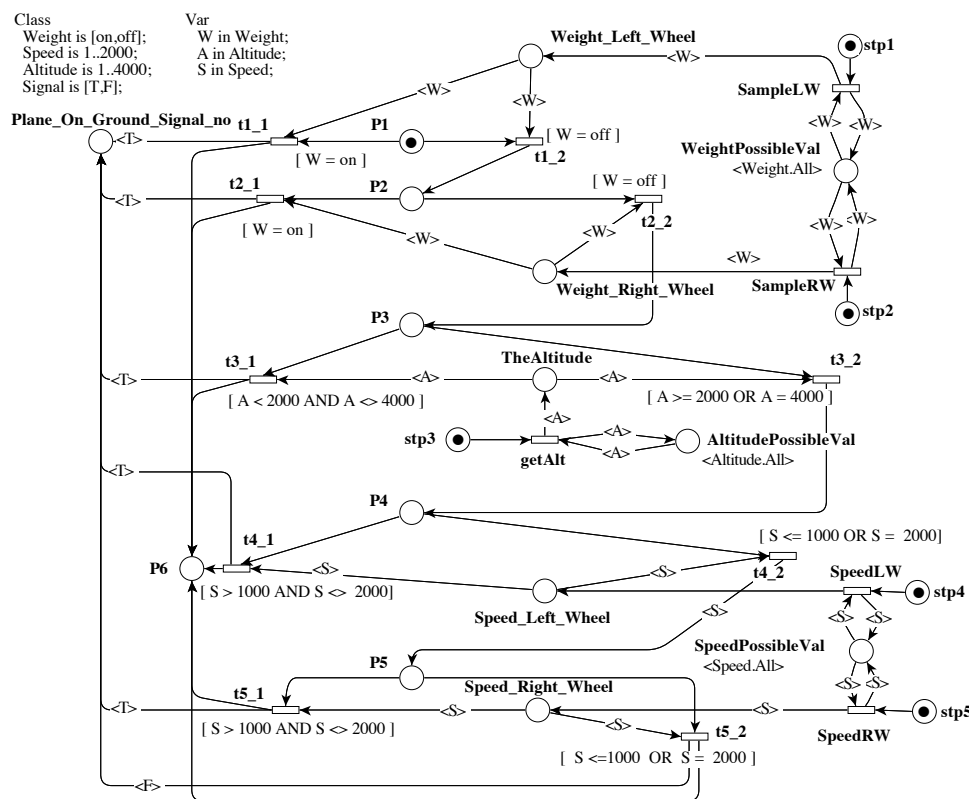

Graphical representation for $N = 1000$

References

[1] A. Diagne, P. Estrailier, F. Kordon, I. Vernier, J. Cazin, M. Doche, C. Seguin, and V. Wiels. Spécification et validation modulaires de systèmes avioniques : Projet FORMA – opération Vamos. Technical Report 4/3599.00/DERI, ONERA – CERT, December 1997.

Scaling parameter

Parameter name	Parameter description	Chosen parameter values
N	A value from which the maximum speed, the maximum altitude, and the associated thresholds are computed	10, 20, 50, 100, 200, 500, 1000, 2000, 4000

Size of the colored net model

number of places: 20
 number of transitions: 15
 number of arcs: 56

Size of the derived P/T model instances

Parameter	Number of places	Number of transitions	Number of arcs
$N = 10$	89	88	333
$N = 20$	159	168	638
$N = 50$	369	408	1553
$N = 100$	719	808	3078
$N = 200$	1419	1608	6128
$N = 500$	3519	4008	15278
$N = 1000$	7019	8008	30528
$N = 2000$	14019	16008	61028
$N = 4000$	28019	32008	122028

Structural properties

- ordinary** — all arcs have multiplicity one ✓
- simple free choice** — all transitions sharing a common input place have no other input place ✗ (a)
- extended free choice** — all transitions sharing a common input place have the same input places ✗ (b)
- state machine** — every transition has exactly one input place and exactly one output place ✗ (c)
- marked graph** — every place has exactly one input transition and exactly one output transition ✗ (d)
- connected** — there is an undirected path between every two nodes (places or transitions) ✓ (e)
- strongly connected** — there is a directed path between every two nodes (places or transitions) ✗ (f)
- source place(s)** — one or more places have no input transitions ✓ (g)
- sink place(s)** — one or more places have no output transitions ✓ (h)
- source transition(s)** — one or more transitions have no input places ✗ (i)
- sink transitions(s)** — one or more transitions have no output places ✗ (j)
- loop-free** — no transition has an input place that is also an output place ✗ (k)
- conservative** — for each transition, the number of input arcs equals the number of output arcs ✗ (l)
- subconservative** — for each transition, the number of input arcs equals or exceeds the number of output arcs ✓ (m)
- nested units** — places are structured into hierarchically nested sequential units⁽ⁿ⁾ ✗

(a) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (b) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (c) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (d) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (e) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (f) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (g) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (h) there exist 3 sink places, e.g., place “P6”.
 (i) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (j) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (k) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (l) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (m) stated by [CÆSAR.BDD](#) version 2.6 on all 9 instances (10, 20, 50, 100, 200, 500, 1000, 2000, and 4000).
 (n) the definition of Nested-Unit Petri Nets (NUPN) is available from <http://mcc.lip6.fr/nupn.php>

Behavioural properties

- safe** — *in every reachable marking, there is no more than one token on a place*? (o)
deadlock — *there exists a reachable marking from which no transition can be fired*? (p)
reversible — *from every reachable marking, there is a transition path going back to the initial marking*? (q)
quasi-live — *for every transition t , there exists a reachable marking in which t can fire*? (r)
live — *for every transition t , from every reachable marking, one can reach a marking in which t can fire* X (s)

Size of the marking graphs

Parameter	Number of reach-able markings	Number of tran-sition firings	Max. number of tokens per place	Max. number of tokens per marking
$N = 10$	43 463 ^(t)	183 664 ^(u)	1	38 ^(v)
$N = 20$	30 8303 ^(w)	1.3391×10^6 ^(x)	1	68 ^(y)
$N = 50$	4.47122×10^6 ^(z)	?	1	158 ^(aa)
$N = 100$	3.48774×10^7 ^(ab)	?	1	308 ^(ac)
$N = 200$?	?	1	608 ^(ad)
$N = 500$?	?	1 ^(ae)	1508 ^(af)
$N = 1000$?	?	1 ^(ag)	3008 ^(ah)
$N = 2000$?	?	1 ^(ai)	6008 ^(aj)
$N = 4000$?	?	?	12008 ^(ak)

(o) stated by [CÆSAR.BDD](#) version 2.6 to be true on 8 instance(s) out of 9, and unknown on the remaining 1 instance(s).
 (p) stated by [CÆSAR.BDD](#) version 2.6 to be true on 5 instance(s) out of 9, and unknown on the remaining 4 instance(s).
 (q) stated by [CÆSAR.BDD](#) version 2.6 to be false on 5 instance(s) out of 9, and unknown on the remaining 4 instance(s).
 (r) stated by [CÆSAR.BDD](#) version 2.6 to be true on 5 instance(s) out of 9, and unknown on the remaining 4 instance(s).
 (s) stated by [CÆSAR.BDD](#) version 2.6 to be false on 5 instance(s) out of 9, and unknown on the remaining 4 instance(s).
 (t) stated by Prod and [CÆSAR.BDD](#) version 2.6.
 (u) stated by Prod in January 2016.
 (v) number of initial tokens, because the net is sub-conservative.
 (w) stated by Prod and [CÆSAR.BDD](#) version 2.6.
 (x) stated by Prod in January 2016.
 (y) number of initial tokens, because the net is sub-conservative.
 (z) stated by [CÆSAR.BDD](#) version 2.6.
 (aa) number of initial tokens, because the net is sub-conservative.
 (ab) stated by [CÆSAR.BDD](#) version 2.6.
 (ac) number of initial tokens, because the net is sub-conservative.
 (ad) number of initial tokens, because the net is sub-conservative.
 (ae) stated by [PNML2NUPN](#) 1.5.1.
 (af) number of initial tokens, because the net is sub-conservative.
 (ag) stated by [PNML2NUPN](#) 1.5.1.
 (ah) number of initial tokens, because the net is sub-conservative.
 (ai) stated by [PNML2NUPN](#) 1.5.1.
 (aj) number of initial tokens, because the net is sub-conservative.
 (ak) number of initial tokens, because the net is sub-conservative.