

This form is a summary description of the model entitled "Token Ring" proposed for the Model Checking Contest @ Petri Nets. Models can be given in several instances parameterized by scaling parameters. Colored nets can be accompanied by one or many equivalent, unfolded P/T nets. Models are given together with property files (possibly, one per model instance) giving a set of properties to be checked on the model.

Description

We consider a system where a set of machines are places in a ring, numbered 0 to N . Each machine i only knows its own state and the state of its left neighbor, i.e., machine $(i - 1) \% (N + 1)$. Machine number 0 plays a special role, and it is called "the bottom machine". The state of each machine is an integer number in $[0, N]$. We will note $S(i)$ the state of machine i .

Each machine may determine if it has a so-called "privilege" based on its state and the one of its left neighbor. A privilege is in this context the right to perform an operation. After performing its operation, the machine updates its own state, and may lose its privilege.


The objective of the protocol is to reach a stable state for the system. In a stable state:

- there is a unique machine with a privilege,
- any subsequent state is also a stable state.

Furthermore, the protocol ensures non-starvation: at any time, any machine is sure to have a privilege after a finite number of steps.

The detail of the protocol is different for the bottom machine, and the other machines:

- The bottom machine has the privilege if its left neighbor state is equal to its own state. In this case, the bottom machine updates its status by incrementing it: if $S(N) = S(0)$ then $S(0) := (S(0) + 1) \% N$
- Any other machine $i > 0$ has the privilege if its left neighbor state is different from its own state. In this case, machine i updates its status by setting it to the value of the left machine: if $S(i - 1) \neq S(i)$ then $S(i) := S(i - 1)$.

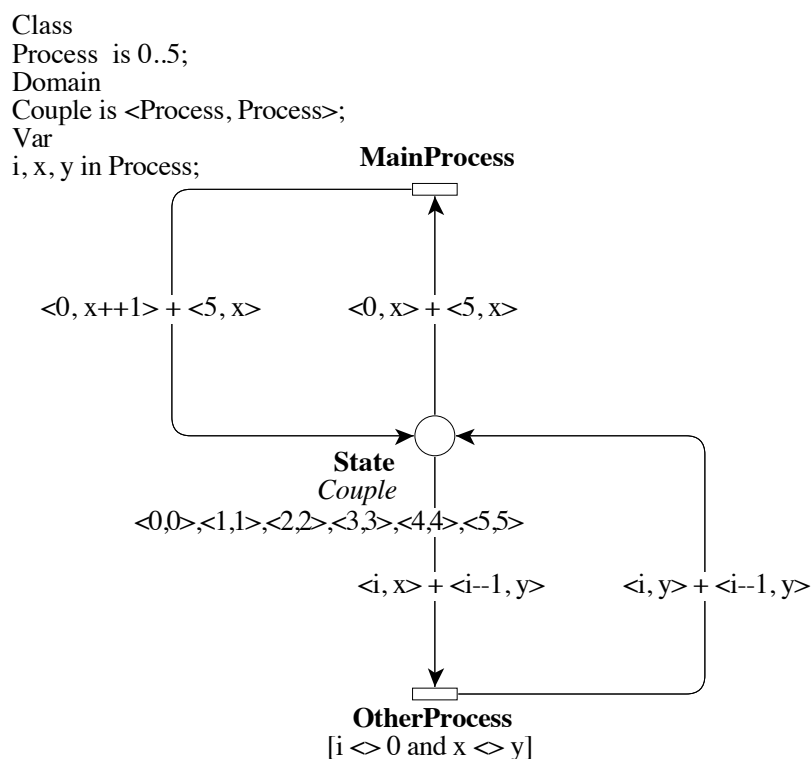

Graphical representation for $N = 5$

References

<http://www.cs.utexas.edu/~EWD/ewd04xx/EWD426.PDF>

Scaling parameter

Parameter name	Parameter description	Chosen parameter values
N	Number of processes. It has an impact on the initial marking of the place <i>State</i> , as well as most of the colored functions.	5, 10, 15, 20, 30, 40, 50

Size of the colored net model

number of places: 1
 number of transitions: 2
 number of arcs: 4

Size of the derived P/T model instances

Parameter	Number of places	Number of transitions	Number of arcs
$N = 5$	36	156	624
$N = 10$	121	1111	4444
$N = 15$	256	3616	14464
$N = 20$	441	8421	33684
$N = 30$	961	27931	111724
$N = 40$	1681	65641	262564
$N = 50$	2601	127551	510204

Structural properties

ordinary — *all arcs have multiplicity one* ✓
simple free choice — *all transitions sharing a common input place have no other input place* ✗ (a)
extended free choice — *all transitions sharing a common input place have the same input places* ✗ (b)
state machine — *every transition has exactly one input place and exactly one output place* ✗ (c)
marked graph — *every place has exactly one input transition and exactly one output transition* ✗ (d)
connected — *there is an undirected path between every two nodes (places or transitions)* ✓ (e)
strongly connected — *there is a directed path between every two nodes (places or transitions)* ✓ (f)
source place(s) — *one or more places have no input transitions* ✗ (g)
sink place(s) — *one or more places have no output transitions* ✗ (h)
source transition(s) — *one or more transitions have no input places* ✗ (i)
sink transitions(s) — *one or more transitions have no output places* ✗ (j)
loop-free — *no transition has an input place that is also an output place* ✗ (k)
conservative — *for each transition, the number of input arcs equals the number of output arcs* ✓ (l)

(a) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (b) stated by CÆSAR.BDD version 2.6 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (c) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (d) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (e) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (f) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (g) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (h) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (i) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (j) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (k) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
 (l) stated by CÆSAR.BDD version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).

subconservative — for each transition, the number of input arcs equals or exceeds the number of output arcs ✓^(m)
nested units — places are structured into hierarchically nested sequential units⁽ⁿ⁾ ✗

Behavioural properties

safe — in every reachable marking, there is no more than one token on a place ?^(o)
deadlock — there exists a reachable marking from which no transition can be fired ✗^(p)
reversible — from every reachable marking, there is a transition path going back to the initial marking ✗
quasi-live — for every transition t , there exists a reachable marking in which t can fire ✓^(q)
live — for every transition t , from every reachable marking, one can reach a marking in which t can fire ✓^(r)

Size of the marking graphs

Parameter	Number of reachable markings	Number of transition firings	Max. number of tokens per place	Max. number of tokens per marking
$N = 5$	166 ^(s)	365 ^(t)	1 ^(u)	6 ^(v)
$N = 10$	58,905 ^(w)	294 050 ^(x)	1 ^(y)	11 ^(z)
$N = 15$	3.5358E+7 ^(aa)	2.6518E+8 ^(ab)	1 ^(ac)	16 ^(ad)
$N = 20$	2.44663E+10 ^(ae)	?	1 ^(af)	21 ^(ag)
$N = 30$?	?	?	31 ^(ah)
$N = 40$?	?	?	41 ^(ai)
$N = 50$?	?	?	51 ^(aj)

^(m) stated by [CÆSAR.BDD](#) version 1.7 on all 7 instances (5, 10, 15, 20, 30, 40, and 50).
⁽ⁿ⁾ the definition of Nested-Unit Petri Nets (NUPN) is available from <http://mcc.lip6.fr/nupn.php>
^(o) stated by [CÆSAR.BDD](#) version 2.0 to be true on 2 instance(s) out of 7, and unknown on the remaining 5 instance(s).
^(p) stated by [CÆSAR.BDD](#) version 2.0 to be false on 2 instance(s) out of 7, and unknown on the remaining 5 instance(s); confirmed at MCC'2014 by Helena on 3 colored instances ($N = 5$, $N = 10$, $N = 15$), and by Lola and Tapaal on 2 P/T instances ($N = 5$ and $N = 10$).
^(q) true in the colored version, false in the P/T unfolding — the latter was confirmed by [CÆSAR.BDD](#) version 1.7 on the unfolded net instances 5 and 10.
^(r) true in the colored version, false in the P/T unfolding — the latter was confirmed by [CÆSAR.BDD](#) version 2.0 on 2 instance(s) out of 7.
^(s) computed at MCC'2013 by GreatSPN, ITS-Tools, Marcie, Neco, and PNXDD; confirmed by [CÆSAR.BDD](#) version 1.8; confirmed by Helena, GreatSPN, Marcie, PNMC, PNXDD, Stratagem, and Tapaal at MCC'2014.
^(t) computed by Helena and Marcie at MCC'2014.
^(u) computed by GreatSPN, PNMC, Marcie, and Tapaal at MCC'2014.
^(v) number of initial tokens, because the net is conservative.
^(w) computed at MCC'2013 by GreatSPN, ITS-Tools, Marcie, Neco, and PNXDD; confirmed by [CÆSAR.BDD](#) version 1.8; confirmed by Helena, Marcie, PNMC, PNXDD, Stratagem, and Tapaal at MCC'2014.
^(x) computed by Helena and Marcie at MCC'2014.
^(y) computed by Marcie, PNMC, and Tapaal at MCC'2014.
^(z) number of initial tokens, because the net is conservative.
^(aa) computed at MCC'2014 by Helena, Marcie, PNMC, and PNXDD; exact value: 35,357,924.
^(ab) computed by Helena and Marcie at MCC'2014; exact value: 265,182,780.
^(ac) computed by Marcie and PNMC at MCC'2014.
^(ad) number of initial tokens, because the net is conservative.
^(ae) computed by PNXDD at MCC'2013; confirmed by PNMC and PNXDD at MCC'2014; exact value: 24,466,267,459.
^(af) computed by PNMC at MCC'2014.
^(ag) number of initial tokens, because the net is conservative.
^(ah) number of initial tokens, because the net is conservative.
^(ai) number of initial tokens, because the net is conservative.
^(aj) number of initial tokens, because the net is conservative.